
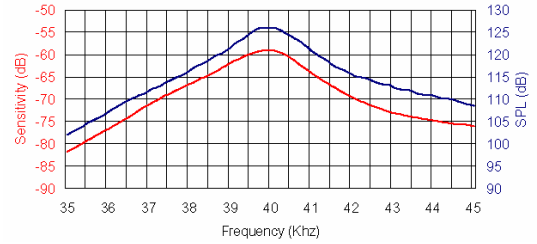


40LR16 Impedance ————
 40LR16 Phase ————
 40LT16 Impedance - - - - -
 40LT16 Phase - - - - -

Sensitivity/Sound Pressure Level
 Tested under 10 Vrms @ 30 cm


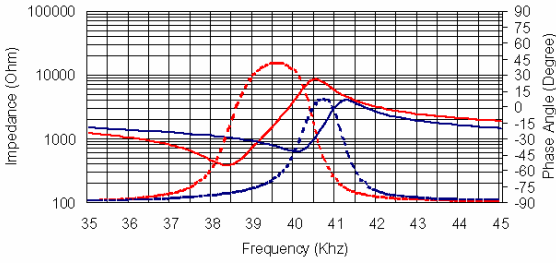


40LR16 Receiver

40LT16 Transmitter



Sensitivity Variation vs. Loaded Resistor

SPL Variation vs. Driving Voltage

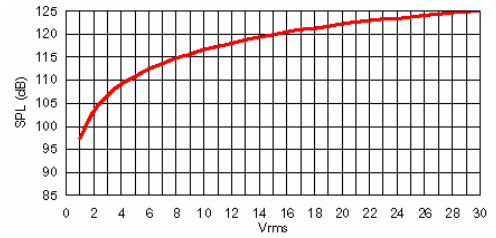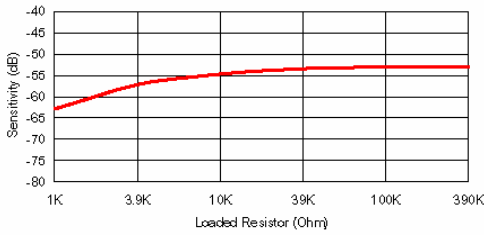



Center Frequency Shift vs. Loaded Resistor

Center Frequency Shift vs. Driving Voltage

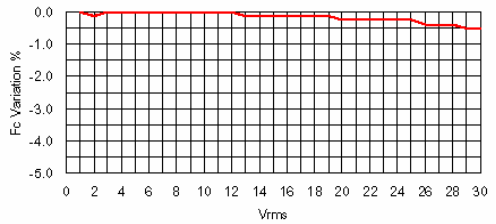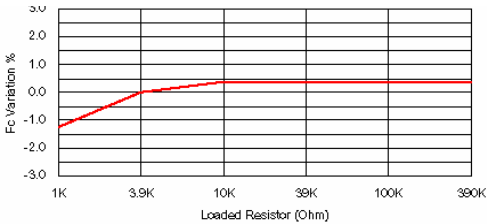

Sensitivity Variation vs. Temperature

SPL Variation vs. Temperature

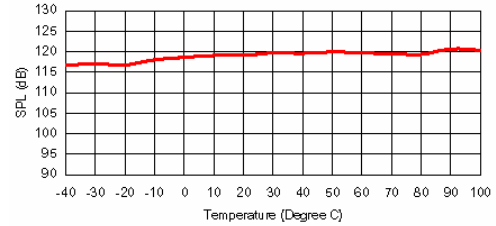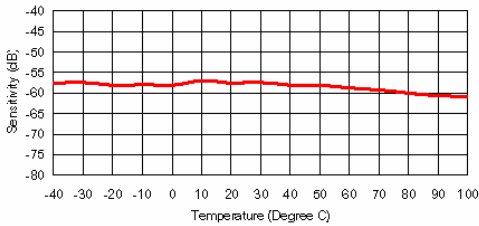

Center Frequency Shift vs. Temperature

Center Frequency Shift vs. Temperature

