



SensComp, Inc.
 36704 Commerce Rd.
 Livonia, MI 48150
 Telephone: (734) 953-4783
 Fax: (734) 953-4518
 www.senscomp.com

600 Series Open Face Transducer

SensComp's Series 600 open face electrostatic transducer is specifically intended for operation in air at ultrasonic frequencies. This transducer extends the range of applications for electrostatic transducer technology, is Parylene coated, and the outer housing is made of 304 stainless steel for harsh environments.

Features

- Open Face Construction
- Parylene Coated
- 50 kHz Electrostatic Transducer
- 304 Stainless Steel Housing
- Narrow Beam Angle of 15° at -6 dB
- Low Ring Characteristics

Part No.

PID# 604144 – Series 600 Open Face Transducer

Benefits

- Improved Performance In:
- Dusty Environments
 - Harsh Chemical Environments
- Splash and Moisture Resistant
 Resistant to Organic and Inorganic Solvents
 Excellent Receive Sensitivity
 Able to Range from 6" to 35'

Applications

- Level Measurement in Tanks
- Proximity Detection in Harsh Industrial and Agricultural Environments


Specifications




Description

The open face construction of SensComp's 600 series transducer minimizes the potential of dust and powdered material collecting on the front face of the transducer.

The added protection of the Parylene conformal coating makes this transducer splash resistant and able to operate more efficiently in harsh chemical environments containing organic and inorganic solvents. Additionally, the Parylene coating provides extended protection against corrosion and mechanical abrasion.

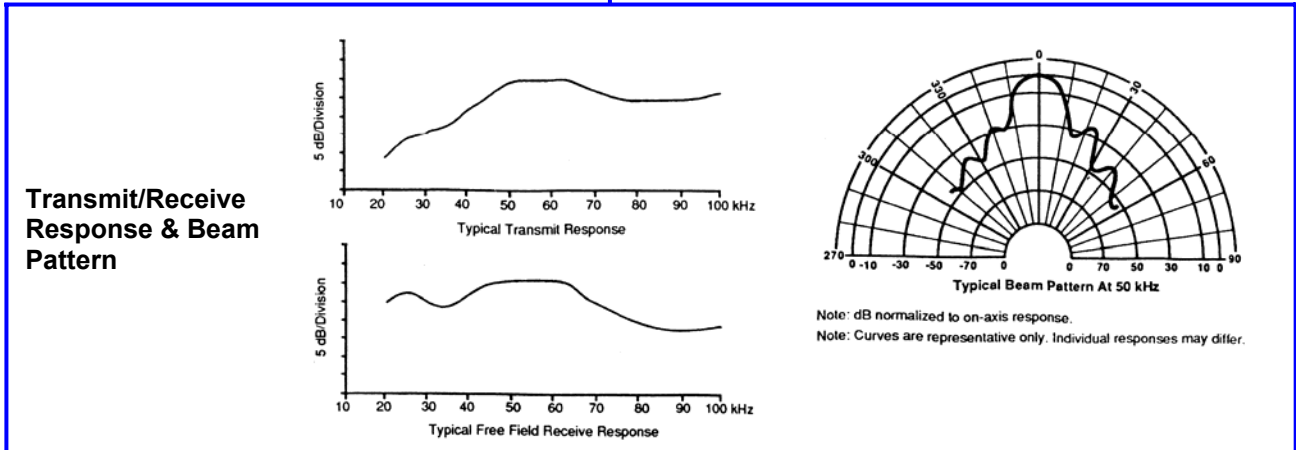

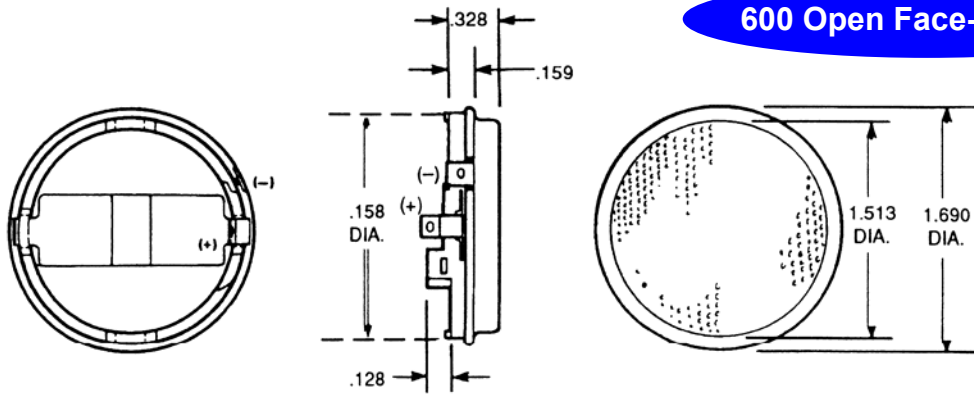

Specifications

Usable Frequency Range		Suggested DC Bias Voltage	200V
Transmitting	See Graph	Suggested AC Driving Voltage	200V peak
Receiving	See Graph	Combined Voltage	400V max
Beam Pattern	See Graph	Capacitance at 1 kHz (typical)	400–500 pf
Typical: 15° at -6dB		(at 150 VDC bias)	
Transmitting Sensitivity	110 dB min	Operating Temperature	-30 to +70° C
at 50.0 kHz; 0dB re 20 µPa at 1 meter		(-20 to 160° F)	
(300 VAC _{PP} ; 150 VDC bias)		Storage Temperature	-40 to 120° C
Receiving Sensitivity	-42 dB min	(-40 to 250° F)	
at 50.0 kHz; 0dB = 1 volt/Pa		Relative Humidity (non condensing)	5% - 95%
(150 VDC bias)		Dimension	
Distance Range	0.15 to 10.7 M	Thickness	0.46 inch
	(0.5 to 35 feet)	Diameter	1.69 inch
Resolution (± 1% over entire range)	± 3mm to 3m	Standard Finish	
	(± 0.12 to 10 ft)	Foil	Gold
Weight	8.2 gm (0.29 oz)	Housing	304 Stainless Steel
			Steel


Specifications subject to change without notice

Environmental Characteristics & Exposures

Note: The following tests were performed in an environmentally controlled test facility with the transducer housed in a custom designed test enclosure. The test enclosure protects the transducer sides and back from exposure to any foreign matter. The rear of the transducer is vented to atmosphere pressure.

After each test, the transducers were cleaned and dried as necessary. Measurements were then taken at room temperature.

- Storage Temperature.....-40 TO 120° C (-40 to 250 ° F)
- Salt Spray Exposure (96 hours)....5% salt spray solution at 95 °
- Shock and Vibration.....50 G peak in each direction along 3 perpendicular axes, pulse duration: 6.5 ms; 6 G's RMS 20-2000 Hz for 6 minute.
- Water Immersion (24 hours).....(vent hole sealed)
- Freeze/Thaw Cycle (4 cycles) Spray with water, drain, expose to -20° F (-30° C) for 20 minutes, allow to warm to room temperature.
- Chemical Exposure.....Gasoline, acetone, sulfur dioxide. Samples sprayed with/ exposed to chemical, then placed in 120° F (49° C) / 90% relative humidity environment for 24 hours.

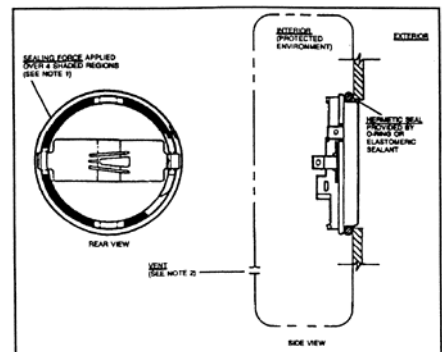

No claims are made for performance without an enclosure providing protection equal to or better than the test enclosure described above. Similarly, no claim is made for performance in any other environments or under any other condition than those controlled conditions described herein.