



SensComp, Inc.
 36704 Commerce Rd.
 Livonia, MI 48150 USA
 Telephone: (734) 953-4783
 Fax: (734) 953-4518
 www.senscomp.com

K Series 125KHF25

SensComp's 'K' Series Closed Face Piezoelectric Transducers – 125KHF25 High Frequency Transceiver

Features

- Closed Face Construction
- Environmentally Rugged
- Durable, Sealed Construction Protects Against Water, Heat, Humidity and Other Elements
- Silicone Rubber Face Material for Optimum Efficiency and Impedance Matching to Air
- Specifically Intended for Operation in Air at Ultrasonic Frequencies


Part No.

PID# 618909LF – 120KHF25 (RoHS Compliant)

Specifications

- 125KHF25**..... Transceiver
- Center Frequency**..... 125.0 ± 10.0 kHz
- Bandwidth (Echo Sensitivity)** 10 kHz
- Echo Sensitivity** -58 dB minimum
 0 dB = 20 Vp-p @ 25 cm
- Dead Zone**..... 20 cm
- Nominal Impedance** 1200 ohm
- Capacitance at 1 kHz ± 20%**..... 1250 pf
- Maximum Driving Voltage (Pulse)** 100 Vp-p
 (10% duty cycle)
- Total Beam Angle (-3 dB)**..... 10° typical
 (-6 dB)..... 14.5° typical
- Matching Window**..... Silicone Rubber
- Operating Temperature** 0° to 70° C
- Storage Temperature** -20° to 80° C
 All Specifications taken typical at 25° C

Dimensions: dimensions are in mm

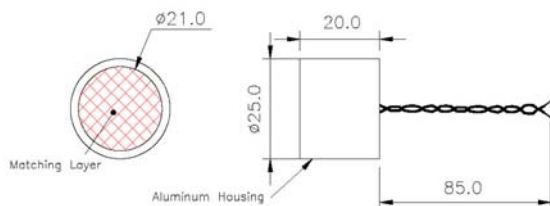


Specifications




Echo Sensitivity/Ringing

Tested under 20Vp-p, 50 bursts, 25cm

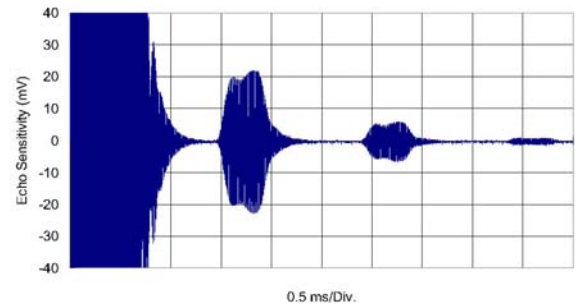


Beam Angle: Tested at 125.0Khz frequency

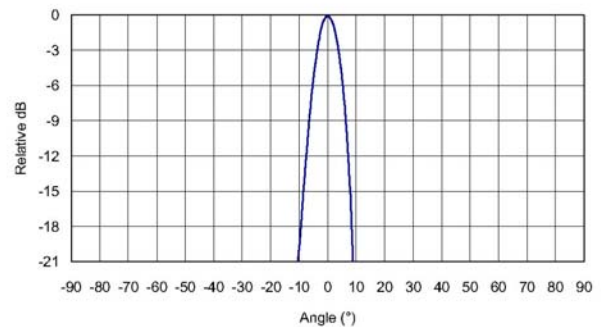

For more information, visit our website: www.senscomp.com

Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

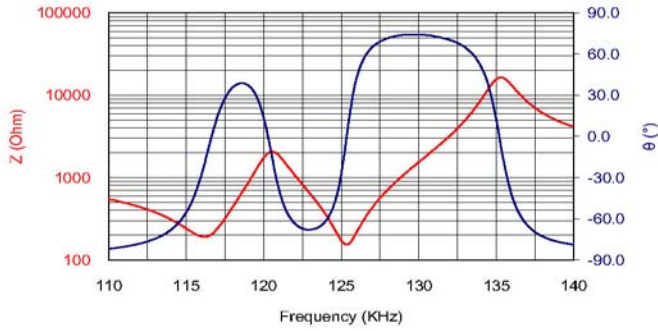

Echo Sensitivity vs. Frequency

Tested at distance of 25cm, 20Vp-p, 50 bursts

