



SensComp, Inc.
 36704 Commerce Rd.
 Livonia, MI 48150
 www.senscomp.com

Power Pack

SensComp Electronic Component – Power Pack

Specifications


Features

- 100-120 VAC Input
- Regulated Output Voltage
- Over-Load protected
- Short Circuit Protected
- RoHS Compliant
- Energy Star and California Energy Commission Regulations Compliant

Part No.

PID# 606768 – Power Pack

Specifications

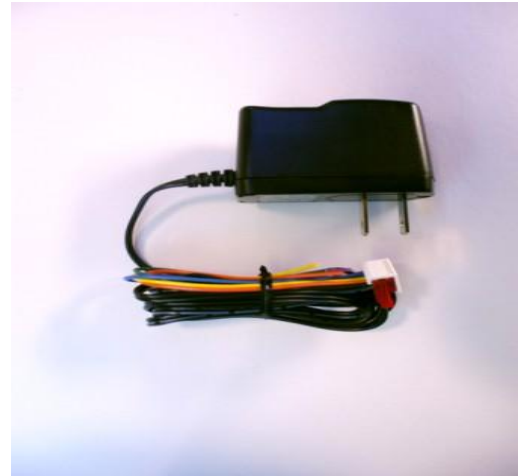

Parameter	Conditions	Min	Nom	Max	Units
Input Voltage		100.0	120.0	130.0	VAC
Input Frequency		47.0	60.0	63.0	HZ
Inrush Current	Peak measured @ 120 VAC (.5mS to Settling)			40.0	A
Power Dissipation	Input: 100 ~ 120 VAC; Output: No load			0.5	W
Output Voltage		11.8	12.0	12.2	VDC
Output Current		0.0		500.0	mA
Power				6.0	W
Ripple & Noise			120.0		mVp-p
Operating Temp.		0.0		40.0	°C
Storage Temp.		-20.0		85.0	°C
Operating humidity		0.1		0.9	RH
Dimensions	43.3 x 63.0 x 26.6 for case only				mm
Cable Length	Pigtail: 6.0 inches long		6.0		Ft.
Weight			3.2		oz.
RoHS Compliant	YES				