

Series 600 Open Face Ultrasonic Sensor with Parylene

SensComp's Series 600 Open Face Electrostatic Ultrasonic sensor is specifically intended for operation in air at ultrasonic frequencies. This ultrasonic sensor extends the range of applications for electrostatic ultrasonic sensor technology, is Parylene coated, and the outer housing is made of 304 stainless steel for harsh environments.

Features

Open Face Construction
Parylene Coated
50 kHz Electrostatic Ultrasonic sensor
304 Stainless Steel Housing
Narrow Beam Angle of 15° at -6 dB
Low Ring Characteristics

Part No.

*PID# 604144 – Series 600 Open Face Ultrasonic Sensor
(with Parylene Coating) *RoHS Compliant

Benefits

Improved Performance In:
- Dusty Environments
- Harsh Chemical Environments
Splash and Moisture Resistant
Resistant to Organic and Inorganic Solvents
Excellent Receive Sensitivity
Able to Range from 6" to 35'

Applications

Level Measurement in Tanks
Proximity Detection in Harsh Industrial and Agricultural Environments

Specifications





Description


The open face construction of SensComp's Series 600 Ultrasonic sensor minimizes the potential of dust and powdered material collecting on the front face of the ultrasonic sensor.

The added protection of the Parylene conformal coating makes this ultrasonic sensor splash resistant and able to operate more efficiently in harsh chemical environments containing organic and inorganic solvents. Additionally, the Parylene coating provides extended protection against corrosion and mechanical abrasion.

Transmit/Receive Response & Beam Pattern

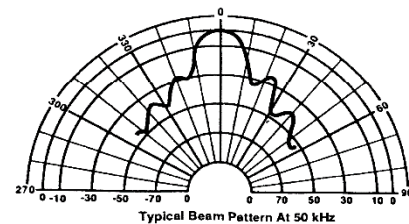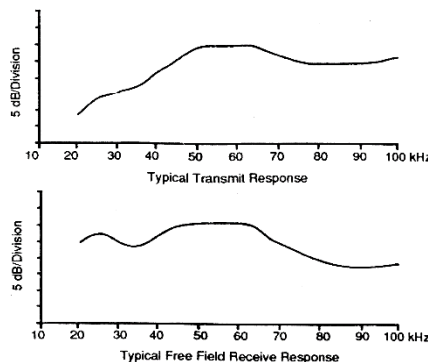

Note: dB normalized to on-axis response.
Note: Curves are representative only. Individual responses may differ.

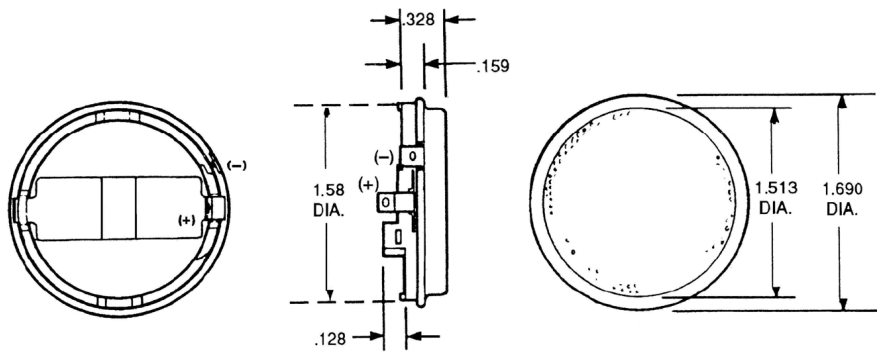

Specifications

Usable Frequency Range		Suggested DC Bias Voltage V
Transmitting	See Graph	Suggested AC Driving Voltage 200V peak
Receiving	See Graph	Combined Voltage V max
Beam Pattern	See Graph	Capacitance at 1 kHz (typical) 400–500 pf
Typical: 15° at -6dB		(at 150 VDC bias)
Transmitting Sensitivity	110 dB min	Operating Temperature
at 50.0 kHz; 0dB re 20 µPa at 1 meter		(-40 to +85° C
(300 VAC _{PP} ; 150 VDC bias)		(-40 to 185° F)
Receiving Sensitivity	-42 dB min	Storage Temperature
at 50.0 kHz; 0dB = 1 volt/Pa		(-40 to 120° C
(150 VDC bias)		(-40 to 250° F)
Distance Range	0.15 to 10.7 M	Relative Humidity (non-condensing)
(0.5 to 35 feet)		5% - 95%
Resolution (± 1% over entire range)	± 3mm to 3m	Dimension
(± 0.12 to 10 ft)		Thickness
Weight	8.2 gm (0.29 oz)	0.46 inch
		Diameter
		1.69 inch
		Standard Finish
		Foil
		Gold
		Housing
		304 Stainless

Notes:


- [1] Lines which may occasionally appear in foil have no effect on product functionality or performance.
- [2] Variations in die depth may result in minor variations of tolerances.

Environmental Characteristics & Exposures

Note: The following tests were performed in an environmentally controlled test facility with the ultrasonic sensor housed in a custom designed test enclosure. The test enclosure protects the ultrasonic sensor sides and back from exposure to any foreign matter. The rear of the ultrasonic sensor is vented to atmosphere pressure.

After each test, the ultrasonic sensors were cleaned and dried as necessary. Measurements were then taken at room temperature.

- Storage Temperature -40 TO 120° C (-40 to 250 ° F)
- Salt Spray Exposure (96 hours) ... 5% salt spray solution at 95 °
 - Shock and Vibration 50 G peak in each direction along 3 perpendicular axes, pulse duration: 6.5 ms; 6 G's RMS 20-2000 Hz for 6 minute.
 - Water Immersion (24 hours)..... (vent hole sealed)
 - Freeze/Thaw Cycle (4 cycles) Spray with water, drain, expose to -20° F (-30° C) for 20 minutes, allow to warm to room temperature.
 - Chemical Exposure..... Gasoline, acetone, sulfur dioxide. Samples sprayed with/ exposed to chemical, then placed in 120° F (49° C) / 90% relative humidity environment for 24 hours.

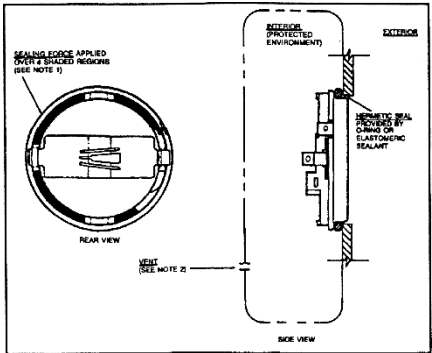

No claims are made for performance without an enclosure providing protection equal to or better than the test enclosure described above. Similarly, no claim is made for performance in any other environments or under any other condition than those controlled conditions described herein.

SENSCOMP PRODUCT SPECIFICATION SHEET DISCLAIMER NOTICE

Information provided in this document is proprietary to SensComp, Inc. ("SensComp") and SensComp reserves the right to make corrections, enhancements, improvements and other changes to its products, specification sheets and data, and to discontinue any product at any time, without further notice. Buyer should obtain the latest relevant information before placing an order and should verify that such information is current and complete. All products are sold subject to SensComp's terms and conditions of sale in effect at the time of order acknowledgment.

SensComp disclaims any and all liability for any errors, inaccuracies or incompleteness contained in any specification sheet or in any other disclosure relating to any product. Information contained herein is strictly for reference and subject to change without notice. SensComp is not liable for any damages that the reader or any third person might suffer as a result of the reader ignoring this warning.

SensComp makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose. SensComp disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential, or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement, and merchantability.

Any performance specs are believed to be reliable but are not verified, and buyer must conduct and complete all performances and other testing of the products, alone and together, with, or installed in any end-product. Buyer shall not rely on any data and performance specs or parameters provided by SensComp.

SensComp assumes no liability for applications assistance or the design of Buyer's products. Buyer is responsible to independently determine suitability of any products and to test, verify and validate its products, designs and applications using SensComp's products or components. To minimize the risks associated with Buyer's products and applications, Buyer should provide adequate design and operation safeguards.

The information provided by SensComp here under is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with buyer. SensComp does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information.

SensComp products have been subject to limited testing and are not authorized for use in aircraft, aviation, nuclear, medical, or safety-critical applications including, but not limited to, life support, and where a failure of the SensComp product would reasonably be expected to cause severe personal injury or death.