

Series 9000 Transducer

SensComp's Series 9000 Piezoelectric transducer is specifically intended for operation in air at ultrasonic frequencies.

Features

48 kHz Piezoelectric Transducer
Asymmetrical Beam Angle of 16° by 38° (typ.)
Rugged Construction
Suited for Harsh Environments
Specifically Intended for Operation in Air at Ultrasonic Frequencies

Part No.

*PID# 618417LF – Series 9000 Transducer

*RoHS Compliant

Benefits

Meets or Exceeds SAE Specification J1455 for Heavy-duty Trucks
Withstands Demands of Automotive Exteriors


Applications

Level Measurement, Proximity Detection, Presence Detection, Robotics, Educational Products
Operation in Outdoor Environments



Description

The Piezoelectric based Series 9000 transducer is specifically intended for operation in air at ultrasonic frequencies. Its rugged construction and unique asymmetrical beam pattern make it an ideal choice to withstand the rigorous demands of the automotive exterior and other harsh environments. This transducer design is intended to meet or exceed the guidelines set forth in SAE specification J1455 for heavy-duty trucks.

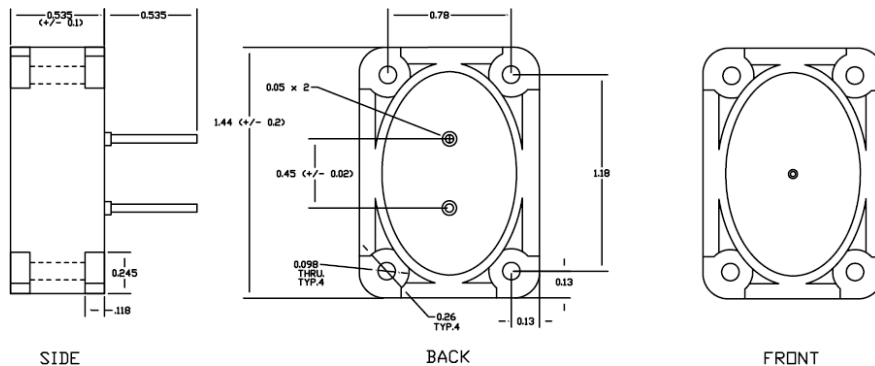

Series 9000 Specifications


Operating Frequency 48 KHz ± 1 kHz
Ringing..... 1.2 mS max.
Bandwidth (97dB) Transmitter... 15 kHz
 (-80dB) Receive..... 15 kHz
Transmitting Sound Pressure Level..... 100 dB min
 0dB re 0.0002 μ bar at 30 cm,
 10 Vrms, at 48 kHz
Receiving Sensitivity -80 dB min
 at 48 kHz; 0dB = 1 volt/ μ bar
Total Beam Angle..... See Graph
 Asymmetrical..... 16° typ. x 38° typ.
Suggested AC Driving Voltage..... 10-120Vp-p
Driving Voltage (10% duty cycle)..... Vp-p max
Impedance 1000 ohms $\pm 10\%$
 at resonant frequency 48 kHz
Capacitance at 1 KHz $\pm 20\%$ 2400 pF
Construction
Outer Housing..... Valox Plastic
Cone..... Anodized Aluminum
Dimensions in inches See Drawing

All specifications are taken @ 25°C typ.

Operating Temperature -30 to +70°C
Storage Temperature..... -40 to +80°C
Relative Humidity (non condensing)..... 98% at 38°C
Salt Spray 5% @ 95% Rh
Altitude Operating 12,000 feet
 Non-Operating 40,000 feet
Dust, Sand, Gravel Bombardment
 1 quart #50 Abrasive Sand, 3.6 ft. drop,
 (20) Repetitions
Mechanical Vibration
 10 G Random Triaxial Vibration,
 50 Hz – 2 KHz for 1 hour
Mechanical Shock
 Survives a 3 foot drop on concrete floor
Steam Cleaning
Input Pressure
 4.5 bf/in² min at 200° F
Pressure Wash
 102 lb/ in² at 104° F at 150 gal/minute
Chemical Exposure
 Gasoline, Solvent, Cleaners, Lubricants


Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

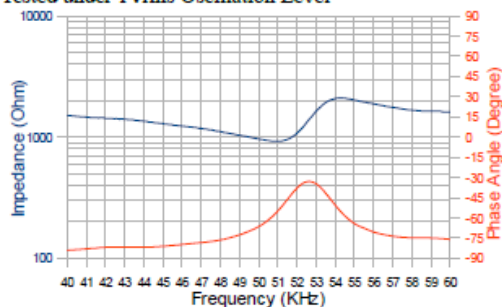


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

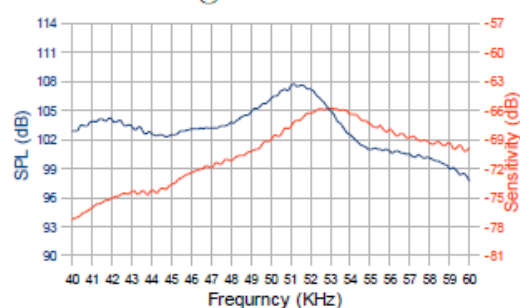

*

Beam Angle: @48KHz

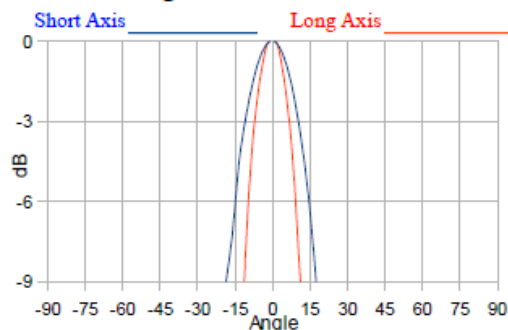

SENSCOMP PRODUCT SPECIFICATION SHEET DISCLAIMER NOTICE

Information provided in this document is proprietary to SensComp, Inc. ("SensComp") and SensComp reserves the right to make corrections, enhancements, improvements and other changes to its products, specification sheets and data, and to discontinue any product at any time, without further notice. Buyer should obtain the latest relevant information before placing an order and should verify that such information is current and complete. All products are sold subject to SensComp's terms and conditions of sale in effect at the time of order acknowledgment.

SensComp disclaims any and all liability for any errors, inaccuracies or incompleteness contained in any specification sheet or in any other disclosure relating to any product. Information contained herein is strictly for reference and subject to change without notice. SensComp is not liable for any damages that the reader or any third person might suffer as a result of the reader ignoring this warning.

SensComp makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose. SensComp disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential, or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement, and merchantability.

Any performance specs are believed to be reliable but are not verified, and buyer must conduct and complete all performances and other testing of the products, alone and together, with, or installed in any end-product. Buyer shall not rely on any data and performance specs or parameters provided by SensComp.

SensComp assumes no liability for applications assistance or the design of Buyer's products. Buyer is responsible to independently determine suitability of any products and to test, verify and validate its products, designs and applications using SensComp's products or components. To minimize the risks associated with Buyer's products and applications, Buyer should provide adequate design and operation safeguards.

The information provided by SensComp here under is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with buyer. SensComp does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information.

SensComp products have been subject to limited testing and are not authorized for use in aircraft, aviation, nuclear, medical, or safety-critical applications including, but not limited to, life support, and where a failure of the SensComp product would reasonably be expected to cause severe personal injury or death.